


In the **1990s**, Scoprega began manufacturing electric inflators, further expanding its product range, and today **electric inflators are the core business**.


Our electric inflators are **recognized worldwide as extremely reliable and high-performance products**. The aim is to combine design, efficiency, reliability and performance in user-friendly products.

Particularly successful, our electric inflators for **SUP** and **KITE** **boast the best performance on the market** in terms of absolute inflation times.

In our range of electric inflators, you can find the **ideal solution for all applications in various industries**. In addition to **Marine** and **Watersport**, our products are highly demanded and appreciated in **Military** and **First Aid applications**.

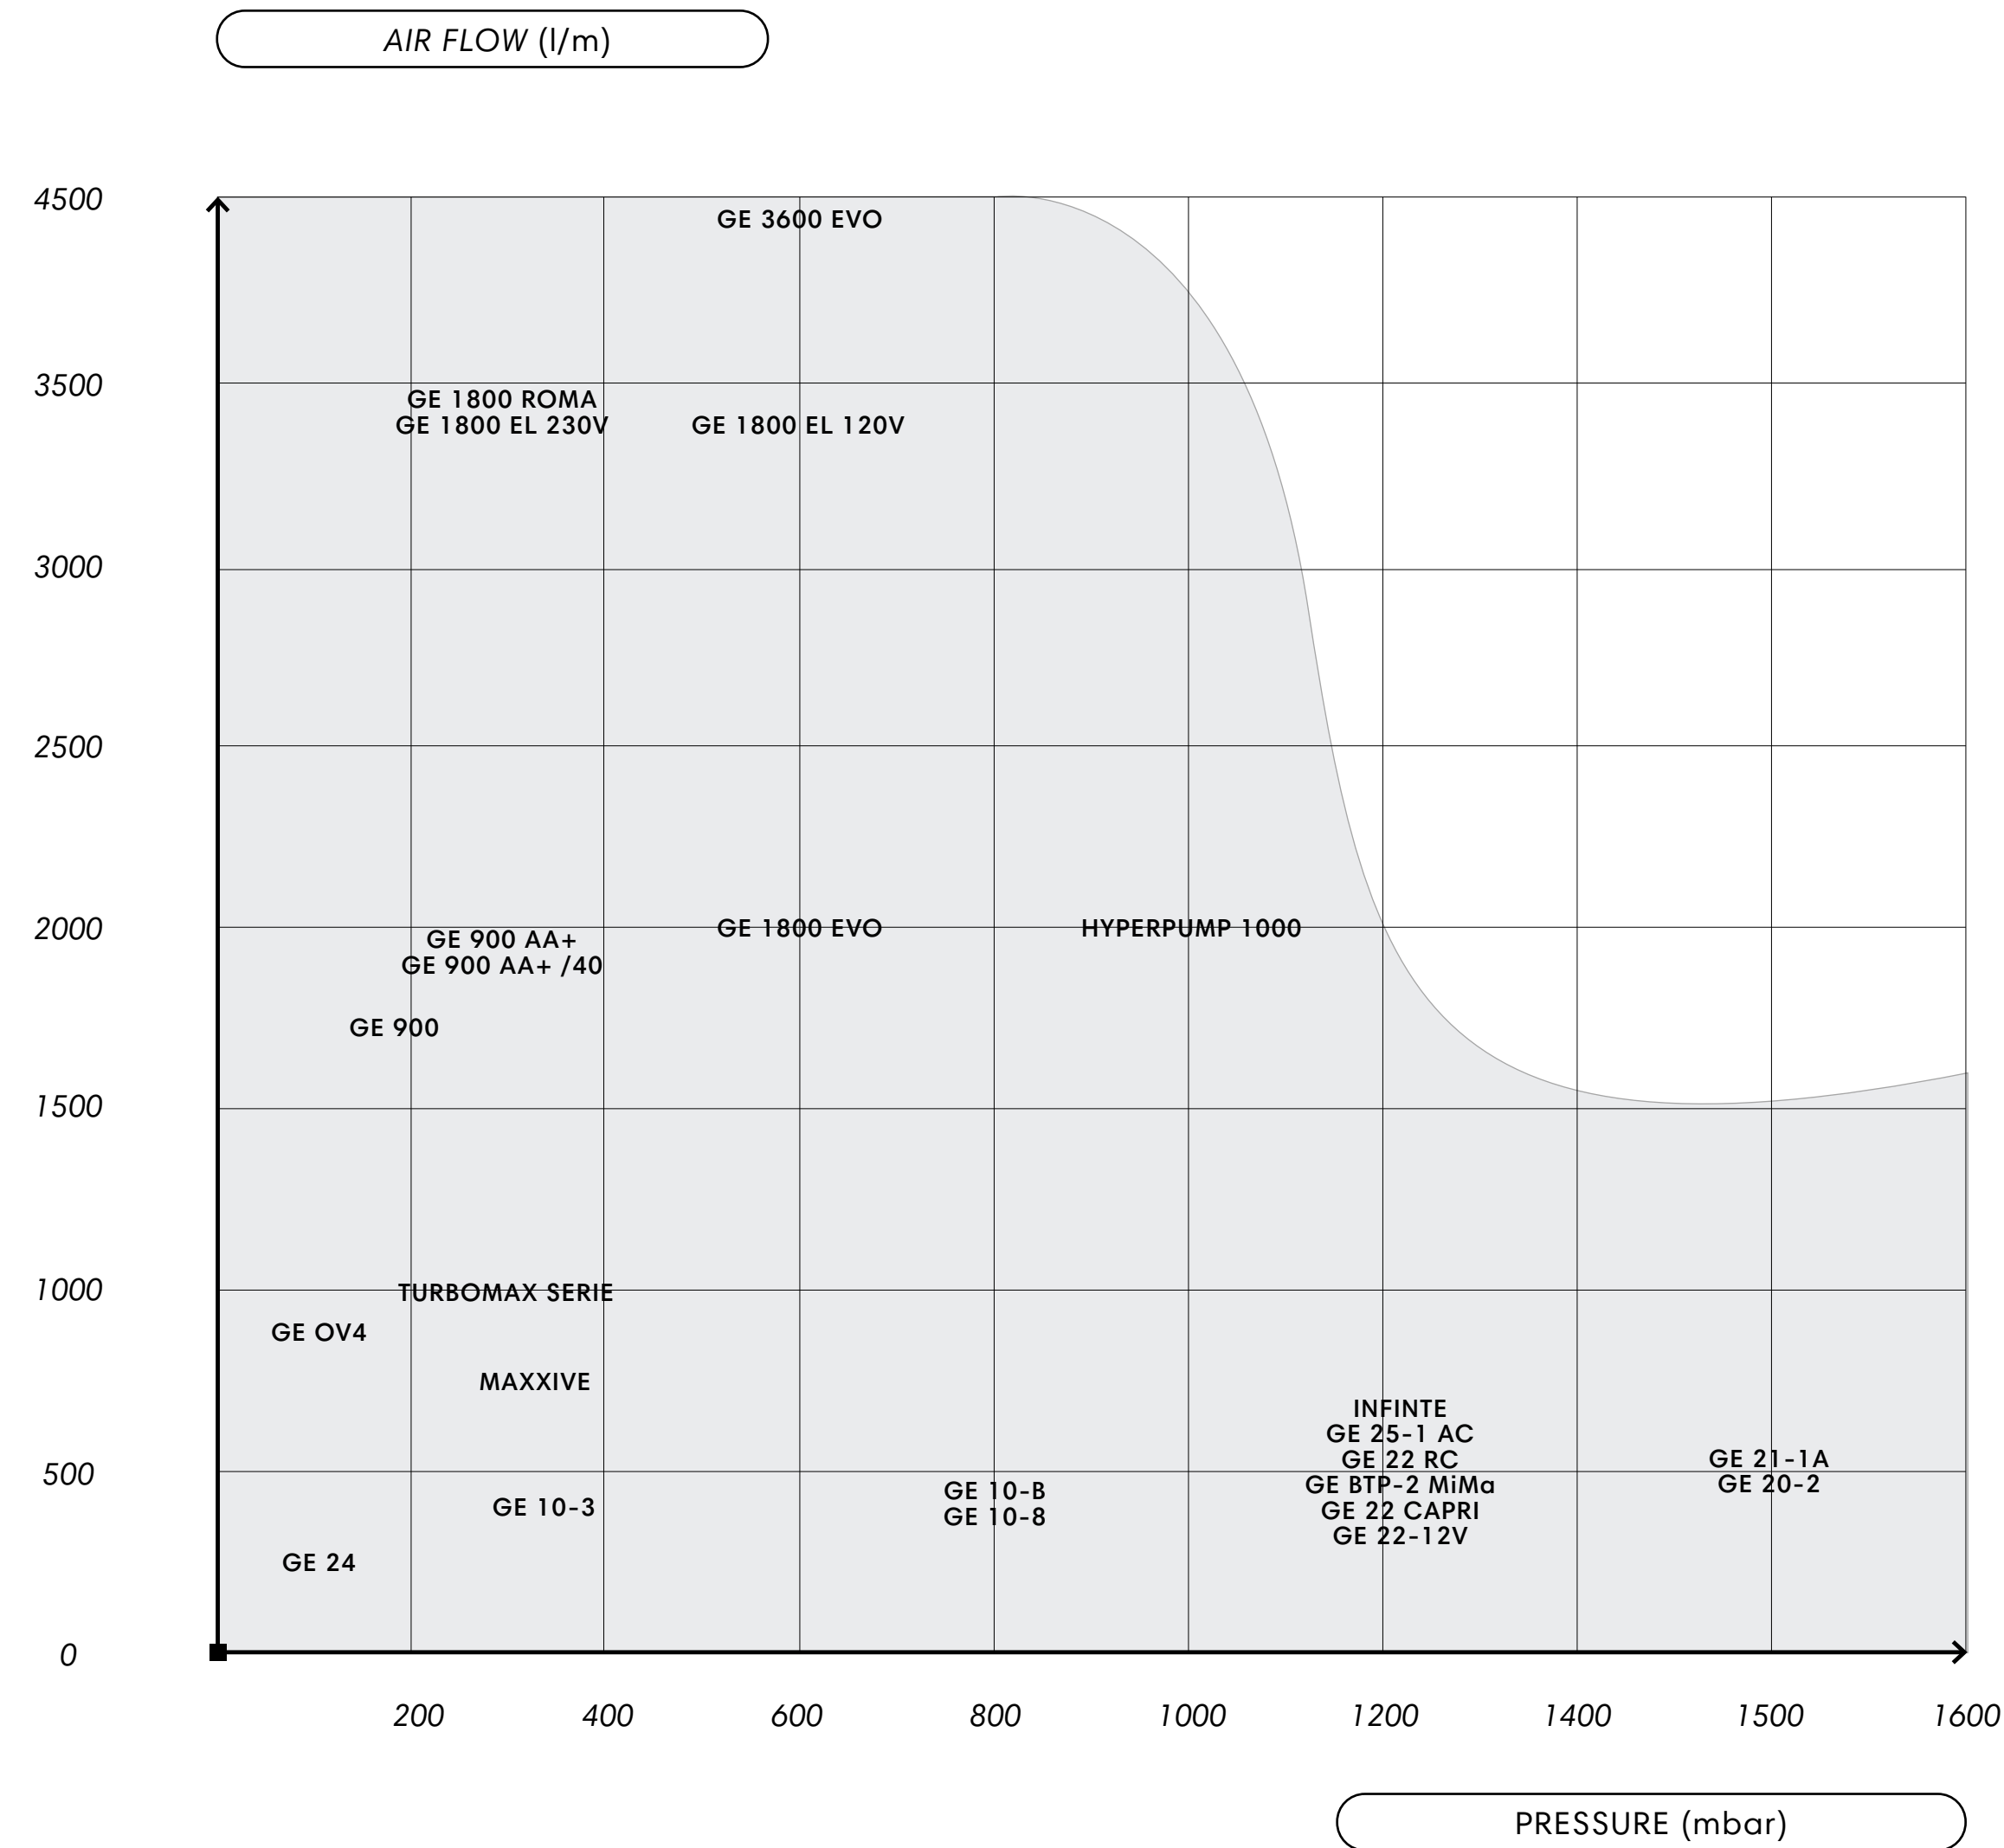

Pressure	Air flow	12V - 24V	120V - 230V
High pressure (higher than 500 mbar)	Low flow rate (less than 500 l/m)	  GE 20-2 GE BTP-2	 GE 25-1 AC
	Medium flow rate (between 500 and 1000 l/m)	    GE 22 RC GE 22 CAPRI GE 22-12V INFINITE	
	High flow rate (higher than 1000 l/m)		    1800 EL 120V 1800 EVO 3600 EVO HYPERPUMP 1000
Medium pressure (between 300 and 500 mbar)	Low flow rate (less than 500 l/m)	   GE 10-3 GE 10-8 GE 10-B	
	High flow rate (higher than 1000 l/m)		  1800 EL 230V 1800 ROMA
Low pressure (less than 300 mbar)	Medium flow rate (between 500 and 1000 l/m)	  GE 24 MAXXIVE	
	High flow rate (higher than 1000 l/m)	  TURBOMAX TURBOMAX KIT	    GE OV4 GE 900 GE 900 AA+ GE 900 AA+/40

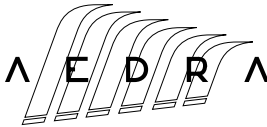Group	Item	Part number	Voltage	Max. pressure	Max. flow rate	Automatic refilling control	Fittings	Inflations hose
GE 25	GE 25-1 AC	GE3S0009	230 Vac (50 hz)	1,2 bar (17.4 psi)	450 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 22	GE 22 RC 12V	GE3S0008	9 ÷ 16 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22 RC 24V	AVAILABLE	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22 CAPRI	GE3S0000	110/230 V	1,25 bar (18,1 psi)	500-125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22 - 12V	GE3S0003	9 ÷ 16 Vdc	1,25 bar (18,1 psi)	500-125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 20-2	GE 20-2	K6130702	110/230 V	1,5 bar (22 psi)	125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 24	GE 24	GE1S0004	110/230 V	150 mbar (2.2 psi)	600 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE BTP-2 MiMa	GE BTP-2 MiMa	GE3S0004	12 Vdc	1,2 bar (18 psi)	420 - 120 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 10	GE 10-3	K6131800	9 ÷ 16 Vdc	300 mbar (4.5 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
	GE 10-8	K6131830	9 ÷ 16 Vdc	800 mbar (11.6 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
	GE 10-B	K6131860	110/230 V	800 mbar (11.6 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
TURBOMAX	TURBOMAX 12 V	6130022	9.5 ÷ 14.5 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	2,80 m - Ø 25 mm - PU
	TURBOMAX 24 V	6130072	19.5 ÷ 28.5 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	2,80 m - Ø 25 mm - PU
	TURBOMAX KIT 12 V	6130021	9.5 ÷ 14.5 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	ON DEMAND
	TURBOMAX KIT 24 V	6130076	19.5 ÷ 28.5 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	ON DEMAND
	MAXXIVE 12 V	AD2S0001	9 ÷ 16 Vdc	240 mbar (3.5 psi)	700 l/min	YES	YES	2,80 m - Ø 21 mm - EPDM
	MAXXIVE 24 V	AD2S0005	18 ÷ 32 Vdc	240 mbar (3.5 psi)	700 l/min	YES	YES	2,80 m - Ø 21 mm - EPDM
	INFINITE 12 V	AD2S0006	9 ÷ 16 Vdc	1,25 bar (18,1 psi)	500-150 l/m	YES	YES	2,50 m - Ø 21 mm - EPDM
	INFINITE 24 V	AD2S0007	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	500-150 l/m	YES	YES	2,50 m - Ø 21 mm - EPDM

Group	Item	Part number	Voltage	Max. pressure	Max. flow rate	Automatic refilling control	Fittings	Inflations hose
HYPERPUMP	HYPERPUMP 1000	GE8S0005	230 Vac (50 hz)	1000 mBar (14.5 psi)	2000 l/m	YES	NO	NO
GE 3600	GE 3600 EVO	GE8S0003	230 Vac (50 hz)	600 mbar (8.7 psi)	4400 l/m	YES	NO	NO
GE 1800	GE 1800 ROMA	K6131900	230 Vac (50 hz)	360 ± 30 mbar (5.2 psi)	3400 l/m	YES	NO	NO
	GE 1800 EL	GE7S0002	120 Vac (60 hz)	600 mbar (8.7 psi)	3400 l/m	NO	YES	1,50 m - Ø 40 mm - PVC
		GE7S0000	230 Vac (50 hz)	360 mbar (5.2 psi)	3400 l/m	NO	YES	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO EC (external control)	GE7S0012	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	YES	YES	1,50 m - Ø 40 mm - PVC
		GE7S0006	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	YES	YES	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO IC (internal control)	GE7S0018	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	YES	YES	1,50 m - Ø 40 mm - PVC
		GE7S0017	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	YES	YES	1,50 m - Ø 40 mm - PVC
GE 900	GE 900	K6131650	120 Vac (60 hz)	170 mbar (2.5psi)	1700 l/m	NO	YES	1,50 m - Ø 25 mm - PU
		K6131600	230 Vac (50 hz)	170 mbar (2.5psi)	1700 l/m	NO	YES	1,50 m - Ø 25 mm - PU
	GE 900 AA+	GE4S0004	120 Vac (60 hz)	250 mbar (3,6 psi)	1700 l/m	NO	YES	1,50 m - Ø 25 mm - PU
		K6131610	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	YES	1,50 m - Ø 25 mm - PU
	GE 900 AA+/40	GE4S0005	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	YES	1,50 m - Ø 40 mm - PVC
GE OV	GE OV4	K6130415	230 Vac (50 hz)	150 mbar (2.2 psi)	950 l/m	NO	YES	1,50 m - Ø 25 mm - PU